MATTE BASE COLOURS DATA SHEET




Definition

This product is a matte acrylic plastic paint with great covering power, it is ideal as a base paint for colouring, especially for outdoor use.

Recommended Uses

Mix this paint with white paint until any desired colour is achieved. However, even by doing so, the quality of the paint will not be degraded; a conventional colourant will degrade the quality of the paint. This paint is mainly used for signage on facades, it also gives both indoor and outdoor surfaces great protection and decoration. An appropriate type of paint must be chosen for each specific application.

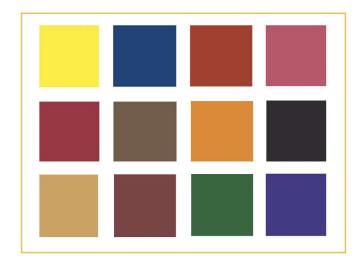



Technical Characteristics

- -Base colour matte acylic paint.
- -Colour: According to all available colours noted on the sheet.
- -Pigment: Concentrated dyes.
- -PH: between 7 and 10.
- -Density: 1.40 ± 0.05 kg./l depending on the colours.
- -Washability: Greater than 5000 double passes.
- -Yeild: 7 12 m2/l with two coats, depending on the type of substrate.
- -Drying: After 4 hours it is dry to the touch. After 48 hours it has dried completely.

Instruction for Use

The surfaces ready for application must always be clean and dry, free of traces of rust, grease, saltpeter, moisture, etc. Surfaces painted with old, defective paints must be sanded and cleaned completely to ensure good adhesion. Do not apply at temperatures below 5°C or above 40°C.

Dilution: Dilution is carried out with water. For the first coats, the product is diluted with 10-20% water. For finishes, it is usually diluted with 5-10% water. Tools should be cleaned with water after use.

Application: It can be applied with a brush, roller and spray gun on cement, concrete, brick, plaster surfaces, etc., that are with good adhesion.



MATTE BASE COLOURS DATA SHEET



Observations

- -Never apply the product at temperatures below 5°C or with humidity above 80%.
- -The paint should be stored in places protected from the sun and excessive cold and in the original containers that are tightly closed.
- -A storage time of no more than 1 year is recommended.

The information contained in this bulletin cannot be taken as a basis for guarentee or liability. PRF and Natirel reserves the right to make technical progress on the product from its current state.



